

# Viva Family Tent

## UNHCR Standard



Fire retardant



Waterproof



Rot-proof



UV stabilised



Logo customisable



### › Key Features

- » Fire retardant, waterproof, rotproof and UV-stabilised<sup>1</sup>.
- » 16 m<sup>2</sup> main floor area plus two 3.5 m<sup>2</sup> vestibules for a total area of 23 m<sup>2</sup>, double-fly with ground sheet.
- » Complies to recommended minimum living area in hot and temperate climates (3.5 m<sup>2</sup> per person), providing extra space for cold climates.
- » Suitable for family of five people.

### › Dimensions

Total living area	23 m <sup>2</sup>
Main floor	16 m <sup>2</sup>
Two vestibule area	3.5 m <sup>2</sup> x 2 = 7 m <sup>2</sup>
Centre height	2.20 m
Width	4.00 m
Ridge length	4.00 m
Side wall height	1.25 m
Centre base length	6.60 m

#### Tent doors (width and height)

Total size	1.30 x 1.40 m
Door flaps	1.40 x 1.60 m
Upper part	1.40 x 0.90 m (PC)
Lower part	1.40 x 0.70 m (PE)


#### Upright poles

2 upright poles	2.20 m
1 centre upright pole	2.17 m
Pole diameter	Ø25 mm x 1.20 mm

#### Side poles

6 side poles	1.25 m
4 door poles	1.40 m
Pole diameter	Ø19 mm x 1.25 mm

### › Graphic Reference

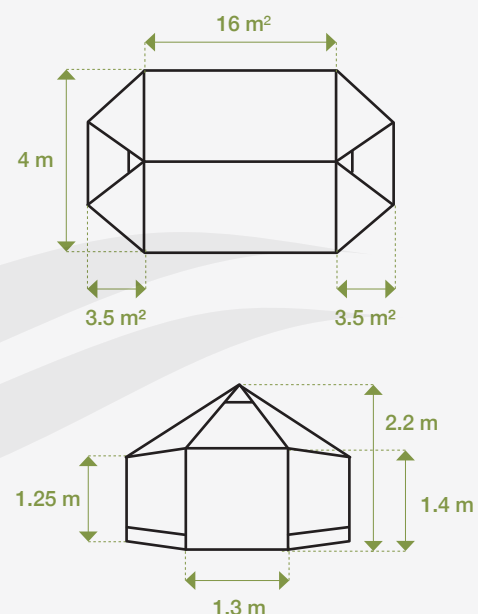

# Viva Family Tent

## UNHCR Standard



### › Materials

Outer tent	Roof: 380 g/m <sup>2</sup> polycotton, natural white (±10%) Wall: 250 g/m <sup>2</sup> polycotton, natural white (±10%)
Inner tent	160 g/m <sup>2</sup> polycotton, natural white
Mud flaps	180 g/m <sup>2</sup> polyethylene (HDPE), black (±5%)
Ground sheet	180 g/m <sup>2</sup> polyethylene (HDPE), black, sewn in bathtub (±5%)

### › Tent Parts

Inner partition	Two half partitions running from centre pole to side wall
Chimney	A chimney reinforcement with a non-perforated opening is placed at 0.50 m from one corner
Windows	Outer tent has two long windows (360 x 30 cm) with mosquito netting and a rain flap running on both sides of the tent
Ventilators	The outer tent has two ventilation openings (25 x 30 cm) in front and back with reinforcement netting and a rain flap

### › Packing and Shipping

Contents	Tent, inner tent, accessories (assembly instruction, content list and repair kit)
Weight per tent	64 ±10% kg approx.
Dimension per tent	225 x 30 x 30 cm
Volume per tent	0.276 m <sup>3</sup>
Number of tents per cage	15
Dimension per cage	225 x 117 x 113 cm
Volume per cage	2.97 m <sup>3</sup>
Weight per cage	1,045 kg approx.

### › Estimated Loadability<sup>2</sup>

Containers	Steel cages	Without cages
20' GP	10 cages, 150 tents	165 tents
40' GP	20 cages, 300 tents	340 tents
40' HC	20 cages, 300 tents	400 tents

<sup>1</sup> Pass CPAI section 5 and 6 as per UNHCR standard with maximum 10s after flame average and maximum 30s after flame per test piece  
Ageing under ISO 4892-2, type A, 360 hours

<sup>2</sup> The loadability provided is based on the maximum volume and weight capacity of the containers. This might change due to road weight restrictions in the country of destination. Please contact our sales team for further clarifications.