



Viva™ Winterization Kit

UNHCR/ICRC/IFRC Standard





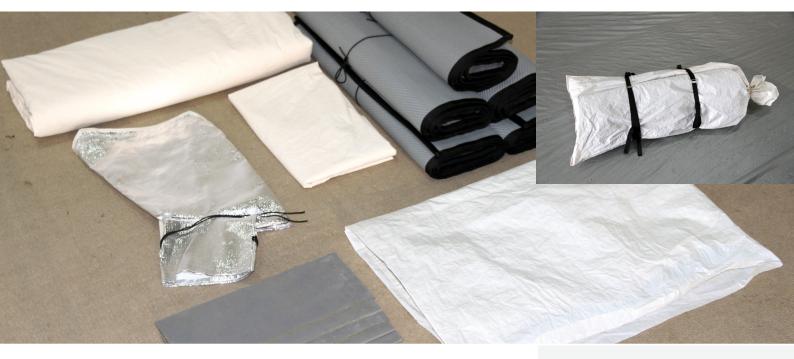

> Key features

- » Specially designed for VivaTM Family Tents to improve the insulation against cold climates
- » The kit includes the following items:
 - 5 insulated sleeping mats
 - 1 winterization liner
 - 1 partition
 - · 1 heat-resistant floor protection (for stove) and
 - · 1 heat-resistant chimney sleeve
- » All components are fire retardant to the level of CPAI84 regulation
- » All materials and additives are non-toxic, free from asbestos and other toxic products according to the EC regulations
- » Individually packed in a strong, waterproof plastic bag made of standard plastic tarpaulin
- » In case FR tent is used, no partition in the kit is to be supplied as the same is available in the tent itself


> Insulated flooring mats

Designed to protect families against cold from the ground or in any other floors during cold weather

| during cold weather | | |
|---------------------------------|---|--|
| Dimensions | 1.8x0.9 m per mat | |
| 1st layer, plastic floor mat | Tight woven twill structure, double thickness, virgin PP multifilament 500 deniers in warp, minimum 1,000 tubes/meter, 500 gsm minimum weight | |
| 2nd layer, alumnized canvas | Synthetic canvas with durable aluminium coating | |
| 3rd layer, fleece blanket | Refer to our Medium Thermal Synthetic Blanket | |
| Design | Heavy-duty ribbon strongly stitched all around the mat | |

> Graphic reference






Heat-resistant floor protection



Heat-resistant sleeve








Viva™ Winterization Kit

UNHCR/ICRC/IFRC Standard





> Inner liner

Designed to fit together to the liner's attachment points and heater flue pipe protection

| Dimensions | Centre height 2.30 m, 3.80 m wide, 1.35 m wall height, 3.80 m base length (slightly different as per tent description) | |
|------------|--|--|
| Materials | » 130 gsm ±10% in finished state except retardant weight » Tensile strength: ISO 13934-1, warp and weft 300N minimum » Tear strength: ISO 9073-4, warp and weft 20N minimum » Colors: Available in yellow, beige, cream or sand | |
| Design | Made from one fold of breathable, rot-proof, fire retardant canvas | |

> Heat-Resistant floor protection

Can be used in any tent to protect the ground sheet when using a stove or heater

| Dimensions | 4-6 plates 4 mm thickness, 0.5x1 m total surface |
|------------|--|
| Materials | Fibrocement plates, 100% fire-proof and rigid material |

> Heat-Resistant sleeve

Can be used only with tents originally equipped with standard chimney patch and flap as described in our Viva™ Family Tent specifications

| Dimensions | 350x700 mm base, 400 mm length, 150 mm hole diameter |
|------------|---|
| Materials | » 100% fire-proof, tear-proof, water-proof soft canvas » Tear resistance under ISO 9073-4: minimum 40N » Waterproof under ISO 811: minimum 20 hpa (20 cm) |
| Design | Pyramid base has velcro to grip to the velcro of the tent chimneyouter flap |

› Packing and shipping

| All items are packed in bale to make one kit | | | | |
|--|---|--|--|--|
| Content per bale | All mentioned components and instruction sheets | | | |
| Weight per kit | 35 kgs approx. | | | |
| Dimension per kit | 93x45x40 cm | | | |
| Volume per kit | 0.17 cbm | | | |
| Number of kits per pallet | 4 | | | |
| Dimension per standard pallet / Euro pallet | 112x82x110 cm / 120x80x110 cm | | | |
| Volume per standard pallet / Euro pallet | 1.01 cbm / 1.056 cbm | | | |
| Weight per standard pallet / Euro pallet | 153 kgs / 164.5 kgs approx. | | | |

> Estimated loadability¹

| Containers | With standard pallets | With Euro pallets | Without pallets |
|------------|-----------------------|----------------------|-----------------|
| 20' GP | 28 pallets, 112 kits | 22 pallets, 88 kits | 160 kits |
| 40' GP | 56 pallets, 224 kits | 48 pallets, 192 kits | 340 kits |
| 40' HC | 56 pallets, 224 kits | 48 pallets, 192 kits | 400 kits |



¹ The loadability provided is based on the maximum volume and weight capacity of the containers. This might change due to road weight restrictions in the country of destination. Please contact our sales team for further clarifications.