

Huggy 72












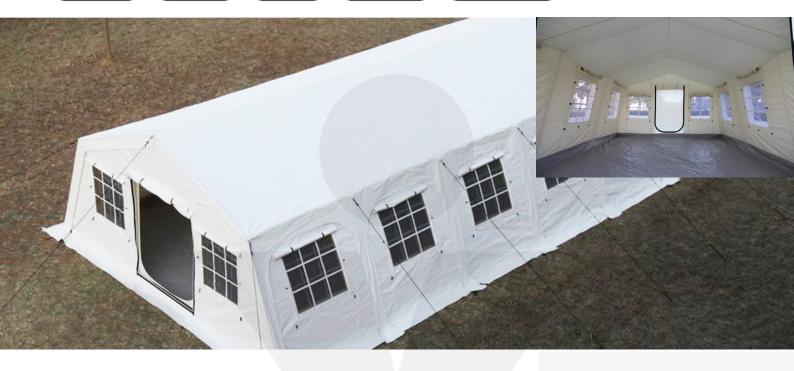

> Key features

- » Waterproof, rotproof and UV-stabilized
- » Lightweight, rectangular and framed tent that can be used for schooling, storage or temporary shelter purposes (comes in three sizes)
- » Outer tent fabric is made of 450 455 g/m² PVC coated fabric, natural white
- » Marking and logo customised to your requirements

> Dimensions


Outer tent

Total size	12 x 6 m	
Center height	2.95 m	
Wall height	2.10 m	
Inner tent		
Center height	2.40 m	
Wall height	1.95 m	

> Materials

Outer tent	450 - 455 gsm fire retardant* PVC coated fabric 5,000 mm, natural white	
Inner tent	120 gsm Polycotton, natural white	
Ground sheet	190 gsm Polyethylene (HDPE), PVC fabric, sewn in bathtub, light grey/natural white	
Windows	 » 12 Windows on long sidewalls 1.05 x 1.10 m with PE stripes reinforcement » 4 Windows on short sidewalls 0.85 x 1.00 m with PE stripes reinforcement 	

> Graphic reference





Outer tent Inner tent





Huggy 72











> Materials

Doors	One door on each gable end side 1.20 x 2.00 m, closed with velcro	
Grond sheet	Double stitched to inner tent, 100 - 200 mm above the ground	
Main frame	 » 64 Aluminum pipes 37 mm diameter, 2 mm thick, silver » 21 Steel connectors, silver » 18 Steel connectors with base plates, silver » 7 Hanging steel connectors, two hooks on each end, silver 	
Seams	All seams are double-stitched with welded main roof seams	

› Packing and shipping

Packages	Content	Weight per package	Total weight	Volume per package	Total volume
Package A	» Outer tent» Assembly manual	135 kg		110 x 94 x 55 cm / 0.569 cbm	
Package B	» Inner tent» Partition» Assembly manual	70 kg		110 x 94 x 40 cm / 0.414 cbm	
Package C	» 64 Frame pipes (62+2)» Assembly manual	100 kg	400 kg	200 x 46 x 38 cm / 0.350 cbm	1.611 cbm
package D	 » 39 Frame connector » 16 Pegs » 7 Hanging connector » Hammer » Instruction sheet 	95 kg		110 x 46 x 55 cm / 0.278 cbm	

> Estimated loadability¹

Containers	Wooden crates
20' GP	16 tents
40' GP	32 tents
40' HC	36 tents

¹ The loadability provided is based on the maximum volume and weight capacity of the containers. This might change due to road weight restrictions in the country of destination. Please contact our sales team for further clarifications.

