



Legend 33 Tent

ICRC/IFRC Standard



Fire retardant (optional)



Waterproof



Rot-proof



UV stabilized



Logo customizable



› Key features

- » Multi-purpose tent which can be used for schooling, office, clinic, health centre, storage or temporary shelter purposes & can be attached to one another to make a longer structure
- » Separate ground sheet for use in tent is available as option in case main tent is used for living conditions / clinics
- » For hot climates shade net with frame is also available as option
- » For increase protection from heat, cold, wind, dust, and insects an Inner tent with sewed in bath tub type ground sheet is available as an option
- » Suitable for 15-30 persons

› Dimensions

Outer tent

| | |
|------------------|------------|
| Total size | 6 x 5.62 m |
| Ridge height | 3.00 m |
| Side wall height | 2.10 m |



Inner tent

| | |
|------------------|---------------|
| Total size | 5.70 x 5.33 m |
| Ridge height | 2.80 m |
| Side wall height | 1.95 m |

› Materials

| | |
|------------|--|
| Outer tent | Roof, wall fabric: Poly-Cotton blended fiber yarns, 310 gsm - 315 gsm, 320 gsm in finished state for the walls |
| Mud flaps | PVC coated fabric polyester 1100 dtex, PVC coated 2 sides 540 gsm |

› Graphic reference

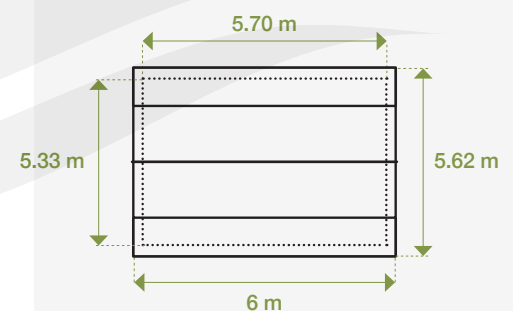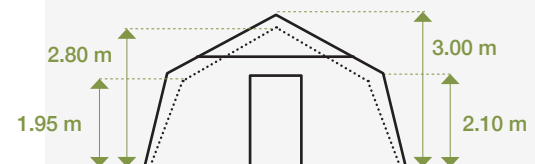

Outer tent Inner tent



NRSRelief

www.nrsrelief.com



Legend 33 Tent

ICRC/IFRC Standard



Fire retardant (optional)



Waterproof



Rot-proof



UV stabilized



Logo customizable

› Tent parts

| | |
|-------------|---|
| Doors | One door on each end with fast opening/closing system and one on each side. Full width opening possible on both ends |
| Ventilation | Two high ventilation windows with sun-visors/ shutters, grill and mosquito netting on each side. One high ventilation window with shutter, canopy/sun-visor and mosquito netting on each gable end |
| Frame | The tent has an aluminum frame with 40 x 2 mm pipes (same length) and steel connectors (same angle) |
| Accessories | One tent with all accessories packed in a bale. Other required accessories including assembling instruction, content list and repair kit included |
| Others | Velcro strips on both sides for logo attachment and two electric cable passages |

› Packing and shipping

| Packages | Content per package (packed in five separate bags) | Weight per package | Volume per package |
|-----------|---|----------------------------------|--|
| Package A | Main tent (flysheet, frame and accessories) | Fly sheet: 88 kg Frame: 95 kg | Flysheet, frame: 210 x 90 x 40 cm / 0.756 cbm |
| Package B | Ground sheet | 25 kg | 165 x 25 x 18 cm / 0.0742 cbm |
| Package C | Shade net + frame | 25 kg | 190 x 40 x 40 cm / 0.304 cbm |
| Package D | Inner tent with attached ground sheet | 44 kg | 200 x 35 x 30 cm / 0.21 cbm |

› Estimated loadability¹

| Container (three sandwich packages per cage) | 20' GP | 40' GP | 40' HC |
|--|--|--|--|
| Dimension of empty cage is 130 x 95 x 114 cm and loaded cage is (210 x 90 x 114cm). Each item per container | Main tent (Sandwich package): 24 pieces, ground sheet: 252 pieces, shade net: 120 pieces, inner tent: 120 pieces | Main tent (Sandwich package): 48 pieces, ground sheet: 504 pieces, shade net: 240 pieces, inner tent: 240 pieces | Main tent (Sandwich package): 48 pieces, ground sheet: 504 pieces, shade net: 240 pieces, inner tent: 240 pieces |
| Without cage | Main tent (Sandwich package): 24 pieces, ground sheet: 375 pieces, shade net: 125 pieces, inner tent: 170 pieces | Main tent (Sandwich package): 52 pieces, ground sheet: 800 pieces, shade net: 252 pieces, inner tent: 335 pieces | Main tent (Sandwich package): 52 pieces, ground sheet: 875 pieces, shade net: 165 pieces, inner tent: 375 pieces |

¹ The loadability provided is based on the maximum volume and weight capacity of the containers. This might change due to road weight restrictions in the country of destination. Please contact our sales team for further clarifications.

² Pass CPAI section 5 and 6 as per UNHCR standard with maximum 10s after flame average and maximum 30s after flame per test piece

• Ageing under ISO 4892-2, type A, 360 hour


NRSRelief
www.nrsrelief.com