

Low Thermal Synthetic Blanket, Recycled

-  Circularity Design
-  Mild temperatures
-  Logo customisable




› Key Features

- › Low thermal synthetic blankets measuring 1.5 x 2 m, made of 100% recycled polyester knitted and dry raised on both sides, conforming to ISO 1833 on dry weight.
- › Offers resistance to fire, thermal transfer, and air flow.
- › Provides a minimum of 0.15 Rct (equivalent to 1.5 TOG).
- › Recommended for indoor use, on a bed, in a house with heating facilities.

› Dimensions and Weight

Total size	1.50 x 2.00 m (Tolerance -1% +3%)
Weight	200 - 400 g/m ²

› Graphic Reference

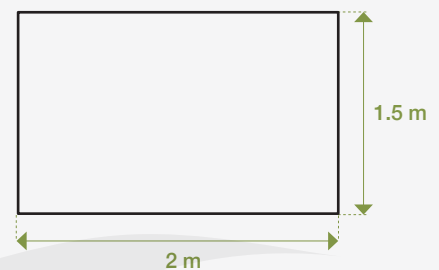


› Technical Specifications


Materials	100% post-consumer recycled fibres from polyester, knitted and dry raised on both sides, C.ISO 1833 on dry weight, grey
Thickness	ISO 5084, 3.5 mm minimum (1KPa on 2,000 mm ²)
Tensile strength	ISO 13934-1: 250N warp and weft minimum
After washing	ISO 13934-1 and ISO 6330: Max 5% warp and weft after 3 consecutive machine washes at 30°C and one flat drying
Shrinkage	ISO 6330: Max 5% warp and weft after 3 consecutive machine washes at 30°C and one flat drying
Weight loss after washing	Max 5% after 3 consecutive machine washes at 30°C and one flat drying
Thermal resistance	ISO 11092: TOG 1.5 (or Rct 0.15 m ² K/W) minimum, rounded to the nearest 0.01, passed on samples picked from compressed bales. After opening of the bale, the blanket shall be dry tumbled in a dryer for 15 minutes (without any other load), at a temperature of less than 30°C and at least 24 hours by flat lying
Air flow resistance	ISO 9237 under 100Pa pressure drop: Max 1,500 L/m ² /s




Low Thermal Synthetic Blanket, Recycled



Circularity Design



Mild temperatures



Logo customisable

Fire resistance	ISO 12952 1: Resistance to cigarette - No ignition ISO 12952 2: Resistance to flame - No ignition
Organoleptic test	No bad smell, no skin irritation, no dust. 4 <pH <9. Free from harmful VOC. Fit for human use
Finish	Whipped seam at 4-7 mm from the edge with 20-35 stitches/10 cm on 4 sides

› Packing and Shipping

	Unpalletised	CRI Pallets	Euro-1 Pallets
Content	25 pieces	4 bales (100 pieces)	4 bales (100 pieces)
Dimensions	80 x 55 x 55 cm ±20%	113 x 77 x 115 cm ±20%	120 x 80 x 115 cm ±20%
Weight	15 kg minimum	72 kg minimum	72 kg minimum
Volume	0.242 m ³ ±20%	1.00 m ³ ±20%	1.104 m ³ ±20%

› Estimated Loadability¹

Container	Unpalletised	CRI Pallets	Euro-1 Pallets
20' DC	150 bales (3,750 pieces)	28 pallets (2,800 pieces)	22 pallets (2,200 pieces)
40' DC	300 bales (7,500 pieces)	60 pallets (6,000 pieces)	48 pallets (4,800 pieces)
40' HC	350 bales (8,750 pieces)	60 pallets (6,000 pieces)	48 pallets (4,800 pieces)

¹ The loadability provided is based on the maximum volume and weight capacity of the containers. This might change due to road weight restrictions in the country of destination. Please contact our sales team for further clarifications.

