



Huggy Air C4 / C6

Connection Corridor With 4 or 6 Side Connections



Durable



Fast Deployment



Cross Door Design



Connection Option



› Key Features


- » Multipurpose corridor tent with integrated inflatable structure for fast deployment.
- » Fitted with 4 or 6 side doors with connection manchet.
- » Free-standing shelter solution for medical and operational applications.
- » Corridor tent solution connecting multiple tents in larger shelter layouts.
- » Self-deploying inflatable design – no metal structural elements.
- » Deploys in less than 15 minutes with 3 persons with an electrical inflator.

› Specifications


System	Self-deploying inflatable tent with modular air frame structure
Style	House shape with vertical walls
Dimensions	(C4) 3.25 x 11.00 m / (C6) 3.25 x 15.40 m
Internal floor area	(C4) 30 m ² / (C6) 42 m ²
Side wall height	2.30 m
Centre height	2.95 m
Peak height	4.05 m
Doors	Roll-up doors with heavy-duty zippers and fold-down threshold in the gables and 4 or 6 in the side walls, 180 x 205 cm (w x h)
Ventilation	PVC mesh ventilation grades with weatherproof hood in top of each gable
Ducts	Double duct openings in the gables, Ø 350 mm with closing flap Cable entry duct in the gables, Ø 80 mm with closing flap
Standard features	Webbing straps along the arches and purlins to attach inner liners or ceiling nets Hanging loops for lights or medical equipment

› Graphic Reference


Front View



Side View (C4)

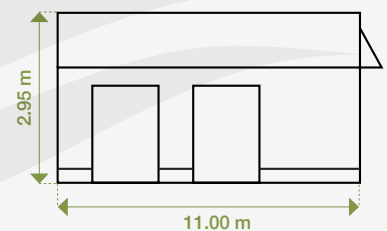


Side View (C6)

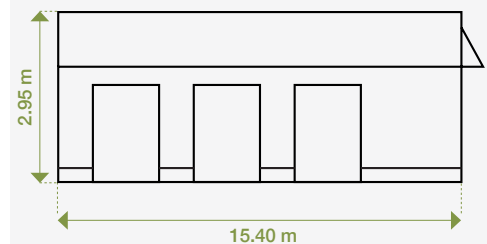
NRSRelief
www.nrsrelief.com

Huggy Air C4 / C6

Connection Corridor With 4 or 6 Side Connections



› Standard Accessories

- » Guy ropes pre-installed. Stakes and hammer in separate bag.
- » Hand pump.
- » Repair kit for air frame, outer cover and groundsheet.
- » Assembly and user manual.

› Optional Accessories

Inflator	Dual-motor electrical inflator (220V or 110V) with hose kit C4/C6
Ceiling net	Knitted PP netting, 100 x 100 mm
Inner liner	Standard or winterised
Entrance Module	200 x 100 cm, 210/225 cm height
Connection module	To ISO Container or car/truck (customised)

› Materials, Construction and Performance

Materials	Cover and floor 250 g/m ² laminated PE fabric, UV resistant, FR CPAI-84 / DIN 4102-B2
Air frame	500 g/m ² PVC coated polyester fabric with airtight TPU lining
Operating pressure	350 mbar (5 psi)
Operating temperature	-20 °C / +50 °C
Wind resistance	<80 km/h
Snow load	<15 kg/m ²
Set up time	(C4) 15 minutes / 3 persons (C6) 20 minutes / 3 persons

› Packing and Shipping

	C4	C6	
Dimensions	215 x 90 x 35 cm	215 x 90 x 40 cm	*Including guy ropes, stakes, hammer, repair kit, user manual, PVC packing sheet
Weight	137 kg approx.	197 kg approx.	
Packing unit			
Dimensions	215 x 90 x 50 cm	215 x 90 x 55 cm	*Inflatable tent with accessories packed in PVC packing sheet strapped on wooden pallet
Weight	150 kg approx.	203 kg approx.	
Volume	0.968 m³ approx.	1.064 m³ approx.	

› Estimated Loadability (C4/C6)

Containers	Pallets	Weight
20 FT	20/20	3,000/4,060 kg approx.
40 FT	40/40	6,000/8,120 kg approx.