



Huggy 24

Multipurpose Tent



Fire retardant



Waterproof



Rot-proof



UV stabilised



All climate zones



› Key Features

- » Presents a lightweight, rectangular, and framed tent suitable for schooling, storage, or temporary shelter purposes.
- » Offers waterproof and UV resistant properties.
- » Utilises outer tent fabric manufactured from 450 - 455 g/m² PVC-coated fabric in a natural white colour.
- » Features a customised marking and logo application to your requirements.

› Dimensions

Outer tent

Total size	6 x 4 m
Center height	2.80 m
Wall height	1.95 m


Inner tent

Center height	2.30 m
Wall height	1.80 m

› Materials

Outer tent	450 - 455 g/m ² fire retardant* PVC coated fabric 5,000 mm, natural white
Inner tent	120 g/m ² ±10% Polycotton, natural white
Ground sheet	190 g/m ² ±10% Polyethylene (HDPE), PVC fabric, sewn in bathtub, light grey/natural white
Windows	» 6 Windows on long sidewalls 0.85 x 0.85 m with polyethylene stripes reinforcement » 4 Windows on short sidewalls 0.70 x 0.85 m with polyethylene stripes reinforcement

› Graphic Reference

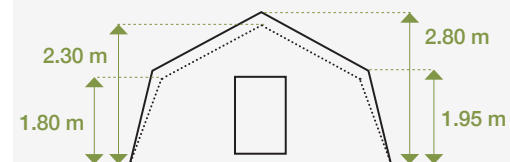


Outer tent Inner tent


NRSRelief
www.nrsrelief.com




Huggy 24

Multipurpose Tent




Fire retardant




Waterproof



Rot-proof



UV stabilised



All climate zones

› Materials

Doors	One door on each gable end side 1.00 x 1.80 m, closed with velcro
Ground sheet	Double stitched to inner tent, 100 - 200 mm above the ground
Main frame	» 35 Aluminum pipes 40 mm diameter, 2 mm thick, silver » 12 Steel connectors, silver » 10 Steel connectors with base plates, silver » 4 Hanging steel connectors
Seams	All seams are double-stitched with welded main roof seams

› Packing and Shipping

Packages	Content	Weight per package	Total weight	Volume per package	Total volume
Package A	» Roof » 2 Walls » 2 Door panels » Inner tent » Instruction sheet	100 kg	195 kg	110 x 94 x 52 cm / 0.538 m ³	0.962 m ³
Package B	» 35 Frame pipes » 22 Frame connectors » 10 Pegs » 4 Hanging connectors » Hammer » Instruction sheet » Repair kit	95 kg		192 x 46 x 48 cm / 0.424 m ³	

› Estimated Loadability¹

Containers	Wooden crates
20' GP	24 tents
40' GP	50 tents
40' HC	60 tents

¹ The loadability provided is based on the maximum volume and weight capacity of the containers. This might change due to road weight restrictions in the country of destination. Please contact our sales team for further clarifications.

