



Huggy Pro - HPT 24

High Performance Tent - UNICEF Standard



Fire retardant



Waterproof



UV stabilised



All climate zones



› Key Features

- » Huggy Pro - High Performance Multipurpose Tent is made of high quality and durable materials, ensuring a strong construction.
- » Comprises an outer cover, shade net, groundsheet, and partition as its solution.
- » Offers a spacious 24 m² tent with vertical walls for optimum use of inner space.
- » Presents cost-efficient, lightweight, and compact packing.
- » Utilises a strong and lightweight high tensile steel frame structure to withstand high wind and snow loads.
- » Allows easy cleaning and disinfection, resisting commonly used disinfectants and detergents, and prevents mildew.
- » Performs highly in hot, cold, and wet weather conditions; does not 'heat up' in direct sunlight, blocks UV, and neither breaks nor absorbs moisture in below-zero temperatures.
- » Provides high comfort thanks to advanced ventilation and large mesh windows.
- » Incorporates environmental considerations with a low energy production process, full recyclability, and safe disposal by burning or burying when recycling is not possible.

› Dimensions


Total size	24 m ²
Floor size	6.0 x 4.0 m (±1%)
Central height outer tent	3.00 m (±1%)
Wall height outer tent	2.05 m (±1%)
Structure	Lightweight tubular steel frame structure
Window size	135 x 135 cm
Ventilation grates	135 x 20 cm

Add-ons

- » Patient liner
- » Inner liner
- » Winter liner with insulated flooring
- » Hard flooring
- » Electrical lighting kit
- » Solar lighting kit

› Graphic Reference


Front view

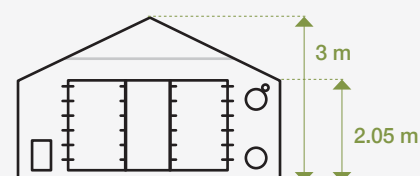

Side view (Window and ventilation)



Top view




NRSRelief

www.nrsrelief.com




Huggy Pro - HPT 24


High Performance Tent - UNICEF Standard




Fire retardant



Waterproof



UV stabilised



All climate zones

› Materials

Outer liner and mud flaps	250 g/m ² ±10% HDPE/LDPE laminated woven fabric, waterproof 5,000 mm, UV resistant, fire retardant CPAI 84 (sections 5 and 6) 30 seconds and durable
Ground sheet	190 g/m ² ±10% HDPE/LDPE laminated woven fabric, waterproof 5,000 mm, fire retardant CPAI 84 (sections 5 and 6) 30 seconds and durable
Shade net	190 g/m ² ±10% HDPE knitted mesh, UV-resistant and fire retardant CPAI 84 (sections 5 and 6) 30 seconds 6x guy rope PP 4.5 m / 10 mm Ø with reflective stripes and 'glow-in-the-dark' PE tensioner
PES mesh, PVC coated, for windows and ventilation grates	195 g/m ² ±10% PVC coated PES knitted mesh, UV resistant and fire retardant Din 75200
Steel tubing for frame	Steel quality: high tensile steel, quality Q195, rolled and welded tubing, electrolytic galvanised Diameter 38 mm, wall thickness 1.5 mm. Frame components are powder coated after fabrication
Partitioning kit	190 g/m ² ±10% HDPE/LDPE laminated woven fabric, waterproof 5,000 mm, UV resistant, fire retardant CPAI 84 (sections 5 and 6) 30 seconds and durable. Attached to frame or inner liner with toggles/loops Overlapping door in centre with toggle/loop closure. Dimensions 600 cm x 210 cm (wall) / 300 cm (centre)
Master bags	PVC 450 g/m ² , waterproof 10,000 mm
Carry bags	Polyethylene HDPE/LDPE laminated woven fabric, waterproof 5,000 mm, fire retardant CPAI 84 (sections 5 and 6) 30 seconds and durable
Doors	Polyethylene material. Centre door: 120 x 200 cm, side doors 150 x 200 cm. Closing by strong block zippers, with buckle closures as back up in case of failure. Mosquito net doors: 80 g/m ² polyester mesh
Accessories	» 6x T-stakes - 50 x 25 / 3 mm / 40 cm » 26x Lollypop pegs - 8 mm Ø 30 cm » 6+4 Twisted spikes - 20 mm Ø 60 cm » 8x Flathead spikes - 10 mm Ø 40 cm » 2x Candy cane pegs - 10 mm Ø 30 cm (canopy kit) » 1x Hammer 3 kg » 6x guy rope PP 4.5 m / 10 mm Ø with reflective stripes and 'glow-in-the-dark' PE tensioner
Repair kit	Patches of all fabrics, needles and tread, duct tape, zipper puller, buckles, rope, runners, webbing, repair instruction, packed in marked pouch with hanging loops
Colours	White outer liner, light grey groundsheet, black trimmings

› Packing and Shipping - Bags/Cages

Main tent, carry bags


Carry bags	Contents	Dimensions (cm)	Volume (m ³)	Weight (kg)	Packing unit
3/9	1x Manual 1x Alignment straps 6x Eave joint 3x Ridge joint 4x Bracing cable	220 x 55 x 30	0.363	25	1/2 Master bag 
4/9	1x Outer cover including 6 guy ropes and runners	220 x 170 x 10	0.374	31	
5/9	2x Gable end cover 1x Ground sheet 1x Partitioning kit	220 x 170 x 10	0.374	31	


NRSRelief
www.nrsrelief.com




Huggy Pro - HPT 24


High Performance Tent - UNICEF Standard




Fire retardant



Waterproof



UV stabilised



All climate zones

› Packing and Shipping - Bags/Cages

Main tent, carry bags

Carry bags	Contents	Dimensions (cm)	Volume (m³)	Weight (kg)	Packing unit
1/9	6x Roof poles 220 cm 6x Purlin 185 cm	222 x 20 x 12	0.053	27	2/2 Master Bag 
2/9	6x Standing pole with base plates 166 cm 6x Extension pole 34 cm 4x Bottom pipe 195 cm	200 x 25 x 13	0.065	25	
6/9	1x Shade net frame complete set 1x Shade net cover including 6 guy ropes with runner	210 x 47 x 16	0.157	26	
7/9	Accessories 6x T-stake 40 cm long 26x Lollypop pegs 30 cm long 6x Twisted spike 60 cm long 1x Hammer	70 x 25 x 12	0.021	20	
8/9	Repair Kit 1m Mesh fabric 1m P.E fabric 1m P.E ground sheet 1m PVC film 1m Shade net fabric 2x Strong needles 1x Roll of sewing thread 1x Roll of duct tape 2x Spare zipper sliders 2x Tension lock 25 mm 2x Tension lock 40 mm 2m Webbing 25 mm 2m Webbing 40 mm 5x Plastic toggle 1m Velcro male/female 25 mm 5m Guy rope 8 mm 2x Guy rope tensioner 8 mm 5x Pin lock 4x Hitch pin 4x Buckle male/female 25	115 x 30 x 8	0.276	3	
9/9	2x H-Frame Kit 8x Flathead spikes 40 cm 4x Twisted spike 60 cm Canopy Kit 2x Standing poles 2x Guy rope with runner of 4 m 2x Candy cane peg 30 cm	220 x 25 x 15	0.066	31	

› Details of Packing Unit


Item name	Packing unit	Content of master bag	Dimensions of master bag (cm)	Volume of master bag (m³)	Weight of master bag (kg)
Frame tent with standard liner	Master Bag 1	Carry bags 3/9, 4/9 and 5/9	222 x 65 x 35	0.505	87 ±5%
	Master Bag 2	Carry bags 1/9, 2/9, 6/9, 7/9, 8/9 and 9/9	222 x 50 x 35	0.388	132 ±5%
	Total			0.893 approx.	219 ±5%


NRSRelief
www.nrsrelief.com




Huggy Pro - HPT 24


High Performance Tent - UNICEF Standard




Fire retardant



Waterproof



UV stabilised



All climate zones

› Estimated Loadability

Item name	Custom Cages	Standard Cages
Item name	Frame tent with standard liner	Frame tent with standard liner
Dimensions of loaded cage	222 x 70 x 75 cm	222 x 92 x 113 cm
Volume of loaded cage	1.165 m ³	2.308 m ³
Quantity per cage	1 tent	3 tents
Weight of 1x loaded cage	252 kg ±5%	706 kg ±5%
Photos		



› Quantity

Item name		20' GP	40' DC	40'HC
Frame tent with standard liner	Standard cage	36	78	78
	Custom cage	24	51	51

› Stackability

Standard cage	3x steel cages (9 x 24 m ² tents), height will be approx. 3.40 m
Custom cage (one tent per cage)	3x steel cages, height will be approx. 2.25 m



For storage purposes, the cages can be stacked 3 cages high.
Be sure to place the cages on a solid floor, or place wooden planks or concrete tiles under the feet of the cages when placed on soft ground.