



Huggy Pro - HPT 36

High Performance Tent



Fire retardant



Waterproof



UV stabilised



All climate zones



› Key Features

- » Huggy Pro - High Performance Multipurpose Tent is made of high quality and durable materials, ensuring a strong construction.
- » Comprises an outer cover, shade net, groundsheet, and partition as its solution.
- » Offers a spacious 36 m² tent with vertical walls for optimum use of inner space.
- » Presents cost-efficient, lightweight, and compact packing.
- » Utilises a strong and lightweight high tensile steel frame structure to withstand high wind and snow loads.
- » Allows easy cleaning and disinfection, resisting commonly used disinfectants and detergents, and prevents mildew.
- » Performs highly in hot, cold, and wet weather conditions; does not 'heat up' in direct sunlight, blocks UV, and neither breaks nor absorbs moisture in below-zero temperatures.
- » Provides high comfort thanks to advanced ventilation and large mesh windows.
- » Incorporates environmental considerations with a low energy production process, full recyclability, and safe disposal by burning or burying when recycling is not possible.

› Dimensions


Total size	36 m ²
Floor size	6.0 x 6.0 m (±1%)
Central height outer tent	3.00 m (±1%)
Wall height outer tent	2.05 m (±1%)
Structure	Lightweight tubular steel frame structure
Window size	135 x 135 cm
Ventilation grates	135 x 20 cm

Add-ons


- » Patient Liner
- » Inner liner
- » Winter liner with insulated flooring
- » Hard flooring
- » Electrical lighting kit
- » Solar lighting kit

› Graphic Reference

Front view

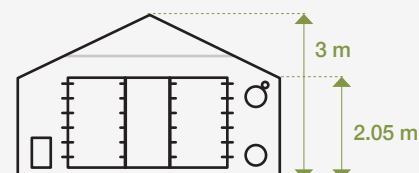

Side view (Window and ventilation)

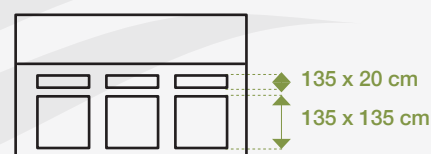

Top view




NRSRelief

www.nrsrelief.com




Huggy Pro - HPT 36


High Performance Tent




Fire retardant



Waterproof



UV stabilised



All climate zones

› Materials

Outer liner and mud flaps	250 g/m ² ±10% HDPE/LDPE laminated woven fabric, waterproof 5,000 mm, UV resistant, fire retardant CPAI 84-6, and durable
Ground sheet	190 g/m ² ±10% HDPE/LDPE laminated woven fabric, waterproof 5,000 mm, fire retardant CPAI 84-5, and durable
Shade net	190 g/m ² ±10% HDPE knitted mesh, UV-resistant, fire retardant CPAI 84-6. 6x guy rope PP 4.5 m / 10 mm Ø with reflective stripes and 'glow-in-the-dark' PE tensioner
PES mesh, PVC coated, for windows and ventilation grates	195 g/m ² ±10% PVC coated PES knitted mesh, UV resistant and fire retardant Din 75200
Steel tubing for frame	Steel quality: high tensile steel, quality Q195, rolled and welded tubing, electrolytic galvanised. Diameter 38 mm, wall thickness 1.5 mm. Frame components are powder coated after fabrication
Partitioning kit	190 g/m ² ±10% HDPE/LDPE laminated woven fabric, waterproof 5,000 mm, UV resistant, fire retardant CPAI 84-6, and durable. Attached to frame or inner liner with toggles/loops. Overlapping door in centre with toggle/loop closure. Dimensions 600 cm x 210 cm (wall) / 300 cm (centre)
Master bags	PVC 450 g/m ² , waterproof 10.000 mm
Carry bags	190 g/m ² ±10% HDPE/LDPE laminated woven fabric, waterproof 5,000 mm, fire retardant CPAI 84-6, and durable
Doors	PE material. Centre door: 120 x 200 cm, side doors 150 x 200 cm. Closing by strong block zippers with buckle closures as back up in case of failure. Mosquito net doors: 80 g/m ² polyester mesh
Accessories	» 8x T-stakes - 50 x 25 / 3 mm / 40 cm » 8x Lollypop pegs - 8 mm Ø 30 cm » 8+4 Twisted spikes - 20 mm Ø 60 cm » 8x Flathead spikes - 10 mm Ø 40 cm » 2x Candy cane pegs - 10 mm Ø 30 cm (canopy kit) » 1x Hammer 3 kg » 8x guy rope PP 4.5 m / 10 mm Ø with reflective stripes and 'glow-in-the-dark' PE tensioner
Repair kit	Patches of all fabrics, needles and tread, duct tape, zipper puller, buckles, rope, runners, webbing, repair instruction, packed in marked pouch with hanging loops
Colors	White outer liner, light grey groundsheet, black trimmings

› Packing and Shipping - Bags/Cages

Main tent, carry bags

Carry bags	Contents	Dimensions (cm)	Volume (m ³)	Weight (kg)	Packing unit
5/14	12x Connectors with hitch pins 4x Bracing cables	220 x 55 x 30	0.363	31.0	Master bag 1 222 x 78 x 45 cm Volume 0.779 m ³ Weight 122.1 kg approx.
8/14	Outer cover incl. 6 guylines + runners	220 x 180 x 10	0.396	42.6	
10/14	Ground sheet + partition	220 x 180 x 5	0.198	19.0	
11/14	Shade cover, 8 guylines + runners	220 x 180 x 7	0.277	16.0	
9/14	2 x Gable cover	220 x 180 x 5	0.198	21.0	




NRS Relief

www.nrsrelief.com




Huggy Pro - HPT 36


High Performance Tent




Fire retardant



Waterproof



UV stabilised



All climate zones

› Packing and Shipping - Bags/Cages

Main tent, carry bags

Carry bags	Contents	Dimensions (cm)	Volume (m³)	Weight (kg)	Packing unit
4/14	8x Standing poles with base plate 6x Extension poles	195 x 20 x 13	0.051	20.5	Master bag 3 222 x 40 x 25 cm Volume 0.222 m³ Weight 72.4 kg approx.
1/14	6x Bottom pipes	200 x 14 x 8	0.022	13.6	
2/14	8x Roof poles	220 x 17 x 8	0.030	19.8	
3/14	9x Purlins	186 x 17 x 10	0.032	18.5	
6/14	Shade cover frame	210 x 50 x 18	0.189	21.0	Master bag 2 222 x 40 x 20 cm Volume 0.178 m³ Weight 83.4 kg approx.
7/14	Canopy kit (2 sticks, 2 rope of 4 m and 3 pegs)	115 x 15 x 6	0.010	3.4	
13/14	Repair kit	115 x 35 x 7	0.028	4.3	
14/14	H-frame + twisted spikes	220 x 25 x 12	0.066	29.5	
12/14	Accessories	100 x 20 x 12	0.024	25.2	
				286.5	

› Estimated Loadability

Item name	Dimensions (cm)	Volume - loaded cage	No. of items - per cage	Weight - one loaded cage
Frame tent with standard liner	  Standard cage 222 x 92 x 113	2.308	2	602 kg approx.
	  Custom cage 222 x 92 x 75	1.532	1	316 kg approx.

› Quantity

Item name	20' GP	40' DC	40'HC
Frame tent with standard liner	Standard cage	24	52
	Custom cage	18	39

› Stackability

Standard cage	3x steel cages (6 x 36 m² tents), height will be approx. 3.40 m
Custom cage (one tent per cage)	3x steel cages, height will be approx. 3.40 m



For storage purposes, the cages can be stacked 3 cages high.

Be sure to place the cages on a solid floor, or place wooden planks or concrete tiles under the feet of the cages when placed on soft ground.


NRSRelief
www.nrsrelief.com