

Viva Non-FR

Family Tent, Ridge - ICRC/IFRC Standard



Waterproof



Rot-proof



UV stabilised



Logo customisable



› Key Features

- » Waterproof, rotproof and UV-stabilised.
- » 16 m² main floor area plus two 3.5 m² vestibules.
- » Large windows (360 cm wide and 60 cm high).
- » Minimum living area in hot and temperate climates.
- » Suitable for family of 5 people.

› Dimensions

Total living area	23 m ²
Main floor	16 m ²
Two vestibule area	3.5 m ² x 2 = 7 m ²
Centre height	2.20 m
Width	4.00 m
Ridge length	4.00 m
Side wall height	1.25 m
Centre base length	6.60 m

Tent doors (width and height)

Total size	1.30 x 1.40 m
Door flaps	1.40 x 1.40 m
Upper part	1.40 x 0.90 m (PC)
Lower part	1.40 x 0.70 m (PE)


Upright poles

2 upright poles	2.20 m (25 mm x 1.2 mm)
1 centre upright pole	2.17 m (32 mm x 1.2 mm)

Side poles


6 side poles	1.25 m
4 door poles	1.40 m
Pole diameter	19 mm x 1mm

› Graphic Reference

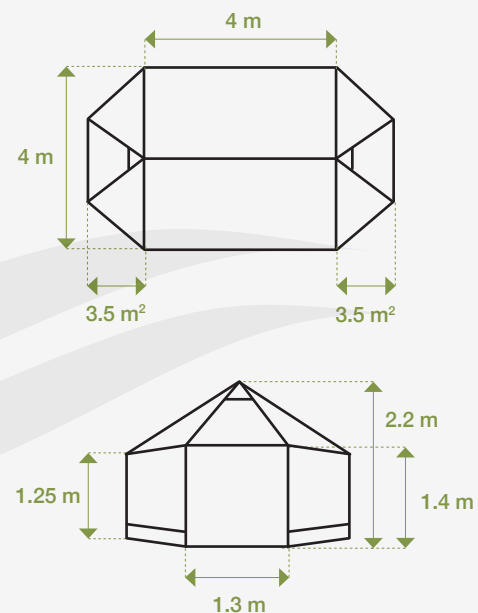

Viva Non-FR

Family Tent, Ridge - ICRC/IFRC Standard



› Materials

Outer tent	Roof: 350 g/m ² ±15% polycotton, natural, waterproof (60% polyester ±10% / 40% cotton ±10%) Wall: 200 g/m ² ±10% polycotton, natural, waterproof (60% polyester ±10% / 40% cotton ±10%) (maximum 70% polyester can be used)
Inner tent	130 g/m ² ±10% polycotton, natural, sand or cream
All PE parts	» Base fabric: woven high density polyethylene (HDPE) black fibres » Coating: white low density polyethylene (LDPE) on both sides » Tear strength: minimum 100 N » Tensile strength: minimum 650 N, 15%-25% elongation in warp and weft
Ground sheet	180 g/m ² ±5% polyethylene (HDPE), white, sewn in bathtub

› Tent Parts

Inner partition	Two half partitions running from centre pole to side wall
Chimney	A chimney reinforcement with a non-perforated opening is placed at 0.50 m from one corner
Windows	Outer tent has two long windows (360 x 60 cm) with mosquito netting and a rain flap running on both sides of the tent
Ventilators	The outer tent has two ventilation openings (35 x 40 cm) in front and back with reinforcement netting and a rain flap

› Packing and Shipping

Contents	Tent, inner tent, accessories (assembly instruction, content list and repair kit)
Weight per tent	55 kg ±3% approx.
Dimension per tent	225 x 30 x 30 cm
Volume per tent	0.2304 m ³
Number of tents per cage	15
Dimension per cage	230 x 119 x 113 cm
Volume per cage	3.09281 m ³
Weight per cage	850 kg approx.

› Estimated Loadability¹

Containers	Unpalletised	Steel Cages
20' GP	160 tents	10 cages, 150 tents
40' GP	330 tents	20 cages, 300 tents
40' HC	400 tents	20 cages, 300 tents

¹ The loadability provided is based on the maximum volume and weight capacity of the containers. This might change due to road weight restrictions in the country of destination. Please contact our sales team for further clarifications.