

# Viva Non-FR

## Family Tent, Ridge



Waterproof



Rot-proof



UV stabilised



Logo customisable



### › Key Features

- » Waterproof, rotproof and UV-stabilised.
- » 16 m<sup>2</sup> main floor area plus two 3.5 m<sup>2</sup> vestibules.
- » Large windows (360 cm wide and 60 cm high).
- » Minimum living area in hot and temperate climates.
- » Suitable for family of 5 people.

### › Dimensions

|                    |                                           |
|--------------------|-------------------------------------------|
| Total living area  | 23 m <sup>2</sup>                         |
| Main floor         | 16 m <sup>2</sup>                         |
| Two vestibule area | 3.5 m <sup>2</sup> x 2 = 7 m <sup>2</sup> |
| Centre height      | 2.20 m                                    |
| Width              | 4.00 m                                    |
| Ridge length       | 4.00 m                                    |
| Side wall height   | 1.25 m                                    |
| Centre base length | 6.60 m                                    |

#### Tent doors (width and height)

|            |                    |
|------------|--------------------|
| Total size | 1.30 x 1.40 m      |
| Door flaps | 1.40 x 1.40 m      |
| Upper part | 1.40 x 0.90 m (PC) |
| Lower part | 1.40 x 0.70 m (PE) |


#### Upright poles

|                       |                         |
|-----------------------|-------------------------|
| 2 upright poles       | 2.20 m (25 mm x 1.2 mm) |
| 1 centre upright pole | 2.17 m (32 mm x 1.2 mm) |

#### Side poles


|               |             |
|---------------|-------------|
| 6 side poles  | 1.25 m      |
| 4 door poles  | 1.40 m      |
| Pole diameter | 19 mm x 1mm |

### › Graphic Reference

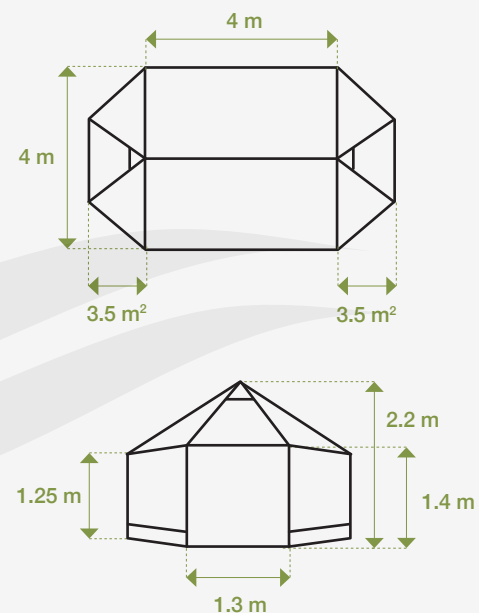

# Viva Non-FR

## Family Tent, Ridge



### › Materials

|              |                                                                                                                                                                                                                                                         |
|--------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Outer tent   | Roof: 350 g/m <sup>2</sup> ±15% polycotton, natural, waterproof (60% polyester ±10% / 40% cotton ±10%)<br>Wall: 200 g/m <sup>2</sup> ±10% polycotton, natural, waterproof (60% polyester ±10% / 40% cotton ±10%)<br>(maximum 70% polyester can be used) |
| Inner tent   | 130 g/m <sup>2</sup> ±10% polycotton, natural, sand or cream                                                                                                                                                                                            |
| All PE parts | » Base fabric: woven high density polyethylene (HDPE) black fibres<br>» Coating: white low density polyethylene (LDPE) on both sides<br>» Tear strength: minimum 100 N<br>» Tensile strength: minimum 650 N, 15%-25% elongation in warp and weft        |
| Ground sheet | 180 g/m <sup>2</sup> ±5% polyethylene (HDPE), white, sewn in bathtub                                                                                                                                                                                    |

### › Tent Parts

|                 |                                                                                                                       |
|-----------------|-----------------------------------------------------------------------------------------------------------------------|
| Inner partition | Two half partitions running from centre pole to side wall                                                             |
| Chimney         | A chimney reinforcement with a non-perforated opening is placed at 0.50 m from one corner                             |
| Windows         | Outer tent has two long windows (360 x 60 cm) with mosquito netting and a rain flap running on both sides of the tent |
| Ventilators     | The outer tent has two ventilation openings (35 x 40 cm) in front and back with reinforcement netting and a rain flap |

### › Packing and Shipping

|                          |                                                                                   |
|--------------------------|-----------------------------------------------------------------------------------|
| Contents                 | Tent, inner tent, accessories (assembly instruction, content list and repair kit) |
| Weight per tent          | 55 kg ±3% approx.                                                                 |
| Dimension per tent       | 225 x 30 x 30 cm                                                                  |
| Volume per tent          | 0.2304 m <sup>3</sup>                                                             |
| Number of tents per cage | 15                                                                                |
| Dimension per cage       | 230 x 119 x 113 cm                                                                |
| Volume per cage          | 3.09281 m <sup>3</sup>                                                            |
| Weight per cage          | 850 kg approx.                                                                    |

### › Estimated Loadability<sup>1</sup>

| Containers | Unpalletised | Steel Cages         |
|------------|--------------|---------------------|
| 20' GP     | 160 tents    | 10 cages, 150 tents |
| 40' GP     | 330 tents    | 20 cages, 300 tents |
| 40' HC     | 400 tents    | 20 cages, 300 tents |

<sup>1</sup> The loadability provided is based on the maximum volume and weight capacity of the containers. This might change due to road weight restrictions in the country of destination. Please contact our sales team for further clarifications.