

Winterization Kit for DomeHome Family Tent

UNHCR Standard



Fire retardant



Logo customizable



› Key features

- » Specially designed for Self Standing Tents to improve the insulation against cold climates
- » The kit includes the following items:
 - 5 insulated sleeping mats
 - 1 winterized inner tent, 3 layers, both outer layers made of breathable 150 gsm polyester cotton fabric and middle layer 100 gsm felt
 - Size: 4.00 x 3.60 m
 - 1 partition
 - 1 heat-resistant floor protection (for stove) and
 - 1 heat-resistant chimney sleeve
- » All components are fire retardant to the level of CPAI84 regulation
- » All materials and additives are non-toxic, free from asbestos and other toxic products according to the EC regulations
- » Individually packed in a strong, waterproof plastic bag made of standard plastic tarpaulin
- » In case FR tent is used, no partition in the kit is to be supplied as the same is available in the tent itself


› Insulated flooring mats

Designed to protect families against cold from the ground or in any other floors during cold weather


Dimensions	4.00 x 3.60 m per mat
1st layer, plastic floor mat	Tight woven twill structure, double thickness, virgin PP multifilament 500 deniers in warp, minimum 1,000 tubes/meter, 500 gsm minimum weight
2nd layer, aluminized canvas	Synthetic canvas with durable aluminium coating
3rd layer, fleece blanket	Refer to our Medium Thermal Synthetic Blanket
Design	Design Heavy-duty ribbon strongly stitched all around the mat

› Graphic reference


Insulated sleeping mats

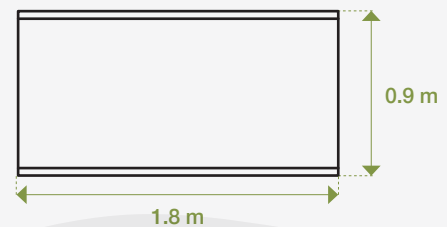

Heat-resistant floor protection

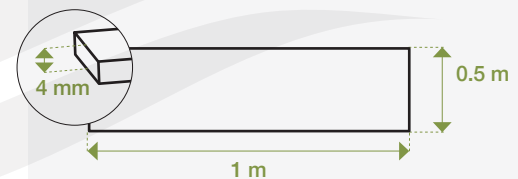

Heat-resistant sleeve

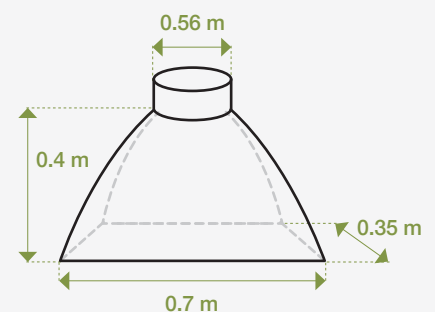

The Winterization kit does not include any stove/heater or fuel. These items must be purchased separately.




NRSRelief


www.nrsrelief.com

Winterization Kit for DomeHome Family Tent

UNHCR Standard



Fire retardant



Logo customizable

› Winterized Inner Tent

Designed to fit together to the outer tent attachment points and heater flue pipe protection

Dimensions	Centre height 2.15 m, 4.00 m wide, 4.10 m base length (slightly different as per tent description)
Materials	<ul style="list-style-type: none"> » 3 Layers, both outer layers made of breathable 150 gsm polyester cotton fabric & middle layer 100 gsm felt » Tensile strength: ISO 13934-1, warp and weft 300 N minimum » Tear strength: ISO 9073-4, warp and weft 20 N minimum » Colors: Available in yellow, Beige, Cream or Sand
Design	Made of 3 layers of fabric

› Heat-Resistant floor protection

Can be used in any tent to protect the ground sheet when using a stove or heater

Dimensions	4-6 plates 4 mm thickness, 0.5 x 1 m total surface
Materials	Fibrocement plates, 100% fire-proof and rigid material

› Heat-Resistant sleeve

Can be used only with tents originally equipped with standard chimney patch and flap as described in our Self Standing Tent specifications

Dimensions	350 x 700 mm base, 400 mm length, 560 mm hole diameter
Materials	<ul style="list-style-type: none"> » 100% fire-proof, tear-proof, water-proof soft canvas » Tear resistance under ISO 9073-4: minimum 40N » Waterproof under ISO 811: minimum 20 hpa (20 cm)
Design	Pyramid base has velcro to grip to the velcro of the tent chimney outer flap

› Packing and shipping

	All items are packed in bale to make one kit	
Content per bale	All mentioned components and instruction sheets	
Weight per kit	58 kgs approx.	
Dimension per kit	95 x 55 x 55 cm	
Volume per kit	0.29 cbm	
Number of kits per customized pallet	04	
Dimension per customized pallet	115 x 95 x 115 cm	
Volume per customized pallet	1.26 cbm	
Weight per customized pallet	255 kgs	

› Estimated loadability¹

Containers	With customized pallets	Without pallets
20' GP	20 pallets / 80 kits	96 kits
40' GP	40 pallets / 160 kits	192 kits
40' HC	40 pallets / 160 kits	240 kits

¹ The loadability provided is based on the maximum volume and weight capacity of the containers. This might change due to road weight restrictions in the country of destination. Please contact our sales team for further clarifications.