

# GeoHome Family Tent

ICRC/IFRC/IOM Standard



Fire retardant



Waterproof



UV stabilised



Logo customisable



## › Key Features

- » New generation family tent, geodesic shape for more beneficiary comfort and safety.
- » Made of two layers: outer tent and shade cover.
- » Offers fire retardant, waterproof and UV resistant properties.
- » Accommodates 5 persons.
- » Enables quick set-up by three persons in 30 minutes.
- » Withstands wind loads up to 120 km/h.
- » Allows rapid deployment in any emergency on pallets or in cages.
- » Adapts to all seasons. Optional inner liner and winter modules available.

## › Dimensions

Total living area	19.6 m <sup>2</sup>
Centre height	2.40 m
Length	4.33 m
Width	5.58 m
Door height	1.70 m

## › Materials

Outer tent  
(roof, walls, mud flaps,  
partition, groundsheets and  
shade fly)

Base fabric: woven high-density polyethylene (HDPE)  
black fibres  
Coating: white low density polyethylene (LDPE) on both  
sides, 170 ±10 g/m<sup>2</sup>  
Fire retardancy: EN13823+AI

Mosquito nets


Polyester. Outer/inner tents: 20-25 holes per cm<sup>2</sup>.

Frame


All aluminium  
Main pipes: outer diameter 18.5 ±0.5 mm,  
thickness 1.2 mm ±1%

## › Graphic Reference

Front view

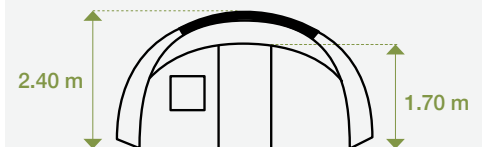

Top view

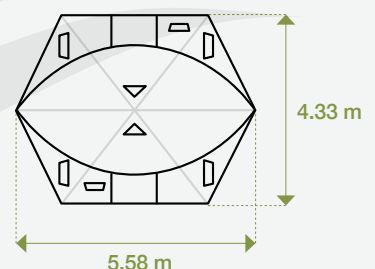

# GeoHome Family Tent

ICRC/IFRC/IOM Standard



## › Tent Parts

Windows	Six windows. Two on each side of the tent and one next to each of the doors 500 mm x 500 mm Lower edge of the window 500 mm from the ground
Ventilation	Two ventilation openings at the top of the tent roof above the doors
Mosquito nets	100% polyester. Outer/Inner tents: 20-25 holes per cm <sup>2</sup>
Doors	Two doors located on the centre of both 0.9 m wide x 1.7 m high

## › Packing and Shipping

Steel Cage									
	Quantity per cage	Type of package	L (cm)	W (cm)	H (cm)	Volume (m <sup>3</sup> )	Weight in kg (1 cage)	Total number of cages	Weight (kg)
20' GP	8	Steel Cage	130	112	113	1.645	405	16	6,480
40' DC	8	Steel Cage	130	112	113	1.645	405	36	14,580
40' HC	8	Steel Cage	130	112	113	1.645	405	36	14,580
Wooden Pallet									
20' GP	4	Wooden Pallet	112	78	105	0.83	200	28	5,600
40' DC	4	Wooden Pallet	112	78	105	0.83	200	60	12,000
40' HC	4	Wooden Pallet	112	78	105	0.83	200	60	12,000
Unpalletised									
20' GP	1	Bale	112	45	40	0.202	47		
40' DC	1	Bale	112	45	40	0.202	47		
40' HC	1	Bale	112	45	40	0.202	47		

## › Estimated Loadability<sup>1</sup> (Without Pallets)

Steel Cage		Wooden Pallet		Unpalletised	
Container	Number of pieces	Container	Number of pieces	Container	Number of pieces
20' GP	128	20' GP	112	20' GP	150
40' DC	288	40' DC	240	40' DC	320
40' HC	288	40' HC	240	40' HC	384

<sup>1</sup> The loadability provided is based on the maximum volume and weight capacity of the containers. This might change due to road weight restrictions in the country of destination. Please contact our sales team for further clarifications.

# GeoHome Family Tent

ICRC/IFRC/IOM Standard



Fire retardant



Waterproof



UV stabilised



Logo customisable



## › Inner Liner (Optional)

- » 160 g/m<sup>2</sup> polycotton, natural
- » Or 110 g/m<sup>2</sup> polyester, natural white



## › Winterization Kit (Optional)

Winter tent made of double layer of 100 g/m<sup>2</sup> polycotton fabric insulated with 80 g/m<sup>2</sup> polyester wadding

