



Huggy 72

Multipurpose Tent



Fire retardant



Waterproof



Rot-proof



UV stabilised



All climate zones



› Key Features

- » Presents a lightweight, rectangular, and framed tent suitable for schooling, storage, or temporary shelter purposes.
- » Offers waterproof and UV resistant properties.
- » Utilises outer tent fabric manufactured from 450 - 455 g/m² PVC-coated fabric in a natural white colour.
- » Features a customised marking and logo application to your requirements.

› Dimensions

Outer tent

Total size 12 x 6 m

Center height 2.95 m

Wall height 2.10 m

Inner tent



Center height 2.40 m

Wall height 1.95 m

› Materials

Outer tent	450 - 455 g/m ² fire retardant* PVC coated fabric 5,000 mm, natural white
Inner tent	120 g/m ² ±10% polycotton, natural white
Ground sheet	190 g/m ² ±10% polyethylene (HDPE), PVC fabric, sewn in bathtub, light grey/natural white
Windows	» 12 Windows on long sidewalls 1.05 x 1.10 m with PE stripes reinforcement » 4 Windows on short sidewalls 0.85 x 1.00 m with PE stripes reinforcement

› Graphic Reference

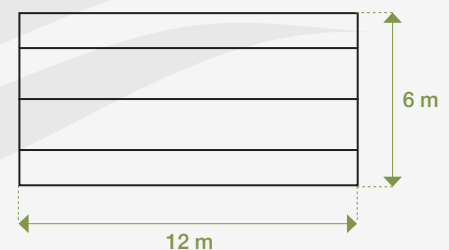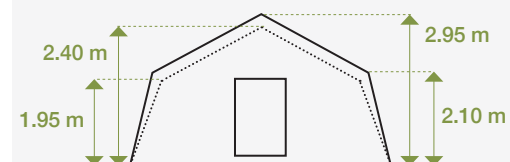

Outer tent Inner tent



Huggy 72

Multipurpose Tent



Fire retardant



Waterproof



Rot-proof



UV stabilised



All climate zones

› Materials

Doors	One door on each gable end side 1.20 x 2.00 m, closed with velcro
Ground sheet	Double stitched to inner tent, 100 - 200 mm above the ground
Main frame	» 64 Aluminum pipes 40 mm diameter, 2 mm thick, silver » 21 Steel connectors, silver » 18 Steel connectors with base plates, silver » 7 Hanging steel connectors, two hooks on each end, silver
Seams	All seams are double-stitched with welded main roof seams

› Packing and Shipping

Packages	Content	Weight per package	Total weight	Volume per package	Total volume
Package A	» Outer tent » Assembly manual	137 kg	400 kg	110 x 94 x 56 cm / 0.579 m ³	1.611 m ³
Package B	» Inner tent » Partition » Assembly manual	70 kg		110 x 94 x 40 cm / 0.414 m ³	
Package C	» 64 Frame pipes (62+2) » Assembly manual	100 kg		200 x 46 x 38 cm / 0.350 m ³	
package D	» 39 Frame connector » 16 Pegs » 7 Hanging connector » Hammer » Instruction sheet	93 kg		110 x 46 x 55 cm / 0.278 m ³	

› Estimated Loadability¹

Containers	Wooden crates
20' GP	16 tents
40' GP	32 tents
40' HC	36 tents

¹ The loadability provided is based on the maximum volume and weight capacity of the containers. This might change due to road weight restrictions in the country of destination. Please contact our sales team for further clarifications.



NRSRelief

www.nrsrelief.com