



Huggy Pro - HPT 72

High Performance Tent - UNICEF Standard



Fire retardant



Waterproof



UV stabilised



All climate zones



› Key Features

- » Huggy Pro - High Performance Multipurpose Tent is made of high quality and durable materials, ensuring a strong construction.
- » Comprises an outer cover, shade net, groundsheet, and partition as its solution.
- » Offers a spacious 72 m² tent with vertical walls for optimum use of inner space.
- » Presents cost-efficient, lightweight, and compact packing.
- » Utilises a strong and lightweight high tensile steel frame structure to withstand high wind and snow loads.
- » Allows easy cleaning and disinfection, resisting commonly used disinfectants and detergents, and prevents mildew.
- » Performs highly in hot, cold, and wet weather conditions; does not 'heat up' in direct sunlight, blocks UV, and neither breaks nor absorbs moisture in below-zero temperatures.
- » Provides high comfort thanks to advanced ventilation and large mesh windows.
- » Incorporates environmental considerations with a low energy production process, full recyclability, and safe disposal by burning or burying when recycling is not possible.

› Dimensions


Total size	72 m ²
Floor size	6.0 x 12.0 m (±1%)
Central height outer tent	3.00 m (±1%)
Wall height outer tent	2.05 m (±1%)
Structure	Lightweight tubular steel frame structure
Window size	135 x 135 cm
Ventilation grates	135 x 20 cm

Add-ons


- » Patient liner
- » Inner liner
- » Winter liner with insulated flooring
- » Hard flooring
- » Electrical lighting kit
- » Solar lighting kit

› Graphic Reference

Front view

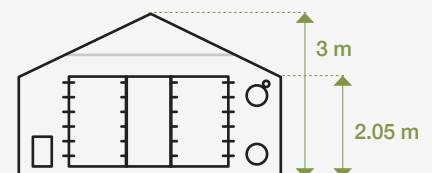

Side view (Window and ventilation)

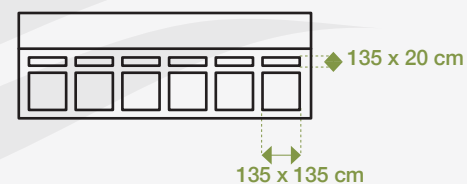


Top view


NRSRelief
www.nrsrelief.com




Huggy Pro - HPT 72


High Performance Tent - UNICEF Standard




Fire retardant



Waterproof



UV stabilised



All climate zones

› Materials

Outer liner and mud flaps	250 g/m ² ±10% HDPE/LDPE laminated woven fabric, waterproof 5,000 mm, UV resistant, fire retardant CPAI 84 (sections 5 and 6) 30 seconds and durable
Ground sheet	190 g/m ² ±10% HDPE/LDPE laminated woven fabric, waterproof 5,000 mm, fire retardant CPAI 84 (sections 5 and 6) 30 seconds and durable
Shade net	190 g/m ² ±10% HDPE knitted mesh, UV-resistant, fire retardant CPAI 84 (sections 5 and 6) 30 seconds 14x guy ropes PP 4.5 m / 10 mm Ø with reflective stripes and 'glow-in-the-dark' PE tensioner
PES mesh, PVC coated, for windows and ventilation grates	195 g/m ² ±10% PVC coated PES knitted mesh, UV resistant and fire retardant Din 75200
Steel tubing for frame	Steel quality: high tensile steel, quality Q195, rolled and welded tubing, electrolytic galvanised. Diameter 38 mm, wall thickness 1.5 mm. Frame components are powder coated after fabrication
Partitioning kit	190 g/m ² ±10% HDPE/LDPE laminated woven fabric, waterproof 5,000 mm, UV resistant, fire retardant CPAI 84 (sections 5 and 6) 30 seconds and durable. Attached to frame or inner liner with toggles/loops. Overlapping door in centre with toggle/loop closure. Dimensions 600 cm x 210 cm (wall) / 300 cm (centre)
Master bags	PVC 450 g/m ² , waterproof 10,000 mm
Carry bags	Polyethylene HDPE/LDPE laminated woven fabric, waterproof 5,000 mm, fire retardant CPAI 84 (sections 5 and 6) 30 seconds and durable
Doors	Polyethylene material. Centre door: 120 x 200 cm, side doors 150 x 200 cm. Closing by strong block zippers, with buckle closures as back up in case of failure. Mosquito net doors: 80 g/m ² polyester mesh
Accessories	» 14x T-stakes – 50 x 25/3 mm / 40 cm » 46x Lollypop pegs - 8 mm Ø 30 cm » 14 + 4 Twisted spikes - 20 mm Ø 60 cm » 8x Flathead spikes – 10 mm Ø 40 cm » 2x Candy cane pegs - 10 mm Ø 30 cm (canopy kit) » 14x guy ropes PP 4.5 m / 10 mm Ø with reflective stripes and 'glow-in-the-dark' PE tensioner
Repair kit	Patches of all fabrics, needles and tread, duct tape, zipper puller, buckles, rope, runners, webbing, repair instruction, packed in marked pouch with hanging loops
Colours	White outer liner, light grey groundsheet, black trimmings

› Packing and Shipping - Bags/Cages

Main tent, carry bags

Carry bags	Contents	Dimensions (cm)	Volume (m ³)	Weight (kg)	Packing unit
2/12	1x Manual 1x Alignment straps 14x Roof poles 220 cm	222 x 25 x 12	0.066	35.90	1/4 Master Bag 
3/12	18x Purlin 185 cm	187 x 25 x 12	0.056	36.50	
11/12	2x H-Frame Kit 8x Flathead spikes 4x Twisted spike 60 cm Canopy Kit 2x Truss 2x Guy rope with runner of 4m 2x Candy cane peg 30 cm	220 x 25 x 12	0.066	30.60	




NRSRelief

www.nrsrelief.com



Huggy Pro - HPT 72

High Performance Tent - UNICEF Standard




Fire retardant



Waterproof



UV stabilised



All climate zones

› Packing and Shipping - Bags/Cages

Main tent, carry bags


Carry bags	Contents	Dimensions (cm)	Volume (m³)	Weight (kg)	Packing unit
5/12	14x Eave joint 7x Ridge joint 8x Bracing cable	210 x 70 x 35	0.515	52.8	2/4 Master Bag 
7/12	1x Outer cover including 14 guy lines and runner	220 x 180 x 14	0.554	76.20	
1/12	12x Bottom pipe 195 cm	200 x 20 x 12	0.048	26.40	3/4 Master Bag 
4/12	14x Standing poles with base plate 166 cm 6x Extension pole 34 cm	195 x 35 x 13	0.089	33.75	
8/12	2x Gable end cover 1x Ground sheet 1x Partitioning kit	200 x 47 x 20	0.198	39.45	
6/12	1x Shade net frame complete set	210 x 50 x 30	0.315	36.55	4/4 Master Bag 
9/12	1 Shade net cover including 14 guy lines and runner	160 x 40 x 25	0.160	29.15	
10/12	Accessories 14x T-Stake 40 cm 46x Lollypop peg 30 cm 14x Twisted spike 60 cm 1x Hammer	100 x 30 x 13	0.039	40.40	
12/12	Repair Kit 3m Mesh fabric 3m P.E fabric 3m P.E ground sheet 3m PVC film 3m Shade net fabric 4x Strong needles 1x Roll of sewing thread 1x Roll of duct tape white 5m x 50mm 2x Spare zipper sliders 2x Tension lock 25 mm 6x Tension lock 40 mm 6m Webbing 25 mm 6m Webbing 40 mm 15x Plastic toggle 2m Velcro male/female 25 mm 15m Guy rope 8 mm 4x Guy rope tensioner 8 mm 10x Pin lock 12x Hitch pin 4x Buckle male/female 25	115 x 35 x 10	0.040	7.75	


NRSRelief
www.nrsrelief.com




Huggy Pro - HPT 72


High Performance Tent - UNICEF Standard




Fire retardant



Waterproof



UV stabilised



All climate zones

› Details of Packing Unit

Item name	Packing unit	Content of master bag	Dimensions of master bag (cm)	Volume of master bag (m³)	Weight of master bag (kg)
Frame tent with standard liner	Master Bag 1	Carry bags 2/12, 3/12 and 11/12	222 x 25 x 45	0.250	105 ±5%
	Master Bag 2	Carry bags 5/12 and 7/12	220 x 85 x 40	0.748	134.5 ±5%
	Master Bag 3	Carry bags 1/12, 4/12 and 8/12	220 x 45 x 35	0.347	102 ±5%
	Master Bag 4	Carry bags 6/12, 9/12 and 12/12	222 x 70 x 30	0.466	116 ±5%
Total				1.811 approx.	457.50 ±5%

› Estimated Loadability

Item name	Custom Cages	Standard Cages
Item name	Frame tent with standard liner	Frame tent with standard liner
Dimensions of loaded cage	222 x 85 x 113 cm	222 x 92 x 113 cm
Volume of loaded cage	2.132 m³	2.308 m³
Quantity per cage	1 tent	1 tents
Weight of 1x loaded cage	489 kg ±5%	491 kg ±5%

Photos



› Quantity

Item name		20' GP	40' DC	40'HC
Frame tent with standard liner	Standard cage	12	26	26
	Custom cage	12	28	28

› Stackability

Standard cage	3x steel cages (6 x 48m² tents), height will be approx. 3.40 m
Custom cage (one tent per cage)	3x steel cages, height will be approx. 3.40 m



For storage purposes, the cages can be stacked 3 cages high.
Be sure to place the cages on a solid floor, or place wooden planks or concrete tiles under the feet of the cages when placed on soft ground.

**NRSRelief**

www.nrsrelief.com